


NEWSLETTER FEBRUARY 2010


DEAR CUSTOMER,

we have the pleasure to submit to you the first news bulletin concerning the Field Service of 3V GLASSCOAT, company of 3V TECH Group, that has a modern factory for the production of glass-lined equipments, guaranteeing the better ITALIAN QUALITY. We will take care of keeping you updated about any news and offers concerning our service.

INSPECTION & REPAIR

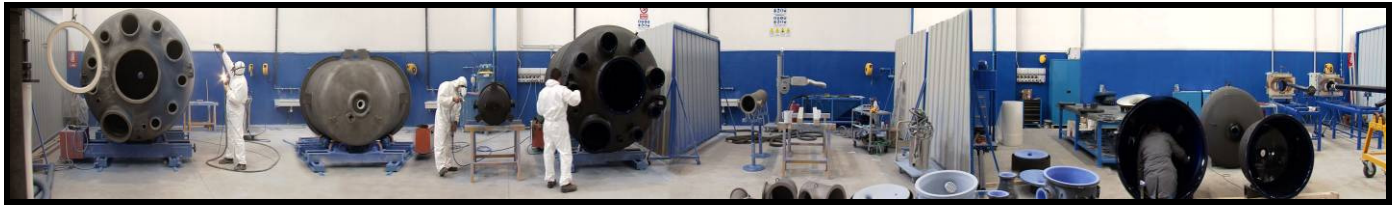

OUR NETWORK AT YOUR SERVICE



Noventa di Piave
(Venice)



Dalmine
(Bergamo)



**Field Service
Coordination**

T: +39 035 0761509

M: +39 348 9158949

service@3vglasscoat.it

VISUAL TEST

Non –destructive test that allows to notice scales, scratches, scrapes, picketing, all caused by heavy working conditions.



STATIFLUX TEST

This control method, consisting of the deposition through compressed air of ceramic particles on the glass-lined surface, allows to notice any glass defect and its dimension.



SPARK TEST

The dielectric test consists in interposing the vitreous glass layer of the carbon steel reactors/tank walls' covering to an electric circuit at high voltage and low current intensity. This test is performed both on the new equipments manufactured in 3VGLASSCOAT using a test voltage of 20 kV, and at your site using a test voltage of 5-7 kV.



REPAIRS

The damages noticed on the glass can be solved through repairs carried out by skilled and qualified technicians. These repairs can be done by tantalum plugs, washers, plates and special repair sleeves.



NEWSLETTER FEBRUARY 2010
SPARE PARTS

3V Glasscoat can rely on a wide warehouse of spare parts for Customers' requirements, such as:

AGITATORS

Our production includes agitator of different types and measures according to standard DIN: impeller, anchor, multistadium, press-lock system, agitator with pitched blade turbine or wide blade hydrofoil.


We offer the possibility to reglass your damaged agitators (both standard DIN and special agitators) very quickly and at competitive prices.


GLASS-LINED DISCHARGE VALVES

3V Glasscoat has in hand a wide range of bottom outlet valves, both pneumatic and manual type, such as: manual operation, pneumatic operation with axial or lateral pneumatic actuator, with washing nozzle, with temperature probes (PT100) available in different types, proximity sensors. We can also manufacture special type as per Customers' requirements.


MECHANICAL SEALS

Our mechanical seals, performed according to standard DIN, are supplied completely assembled and already tested. 3V Glasscoat range covers from std. DN 40 to DN 160. Moreover our staff is skilled and qualified in reconditioning the old mechanical seals or in replacing the damaged seals with new ones.

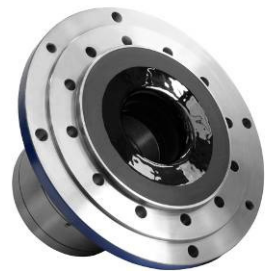
SERVICE DAY!


To let you know our production and our technicians' repair and test methods, we have the pleasure to welcome you at our plant located in Noventa di Piave for a **FREE TRAINING DAY**.

We will take care of arranging a **PERSONAL TRAINING SESSION** to meet your expectations.

CONTACT US TO SCHEDULE YOUR SERVICE DAY IN 3V GLASSCOAT!